

**NEW Model :** AGYG09LVCA / AGYG12LVCA / AGYG14LVCA



Wireless R.C.



For AGYG09/12LVCA




For AGYG14LVCA




**Features**

**Flexible & easy installation**

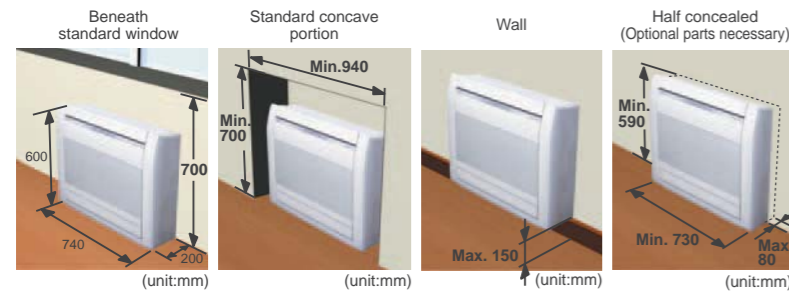


**2-Fan & Wide airflow**

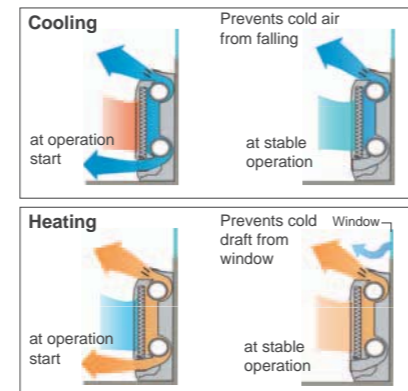

**Filter features**

**Ion Deodorization Filter**  
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.

**Apple-catechin Filter**




**Apple-catechin Filter**  
The Apple-catechin filter uses static electricity to clean fine particles and dust in the air.


**Ion Deodorization Filter**

Using different filters at both sides

**Flexible piping connection 6 direction of drain & piping**



**Low ambient operation**

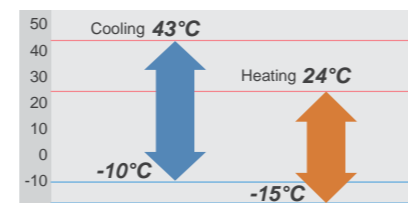

**Optional parts**

- Wired Remote Controller: UTY-RNNYM, UTY-RVNYM
- Simple Remote Controller: UTY-RSNYM
- Half Concealed Kit: UTR-STA
- External Connect Kit: UTY-XWZX

**Specifications**

Model No.	Indoor unit		AGYG09LVCA	AGYG12LVCA	AGYG14LVCA
	Outdoor unit		AOYG09LVCA	AOYG12LVCA	AOYG14LVLA
Power Source	V/∅/Hz		230/1/50	230/1/50	230/1/50
Capacity	Cooling	kW	2.6(0.9~3.5)	3.5(0.9~4.0)	4.2(0.9~5.0)
	Heating	kW	3.5(0.9~5.5)	4.5(0.9~6.6)	5.2(0.9~8.0)
Input Power	Cooling/Heating	kW	0.53/0.79	0.94/1.19	1.14/1.44
EER	Cooling	W/W	4.91	3.72	3.68
	Heating	W/W	4.43	3.78	3.61
COP	Cooling/Heating (@-10°C)	kW	2.6/2.9	3.5/3.8	4.2/4.7
SEER	Cooling	W/W	7.00	6.50	6.40
	Heating (Average)	W/W	4.20	4.00	4.00
SCOP	Cooling		A++	A++	A++
	Heating (Average)		A+	A+	A+
Running Current	Cooling/Heating	A	2.6/3.8	4.4/5.5	5.2/6.4
Annual Energy Consumption	Cooling	kWh/a	130	188	230
	Heating	kWh/a	967	1330	1645
Moisture Removal		l/h	1.3	1.8	2.1
Sound Pressure (Cooling)	Indoor	H/M/L/Q	40/35/29/22	40/35/29/22	44/38/31/22
	Outdoor	High	47	48	50
	Indoor	High	55	55	58
Sound Power (Cooling)	Indoor	High	64	64	65
	Outdoor	High			
Airflow Rate (High)	Indoor / Outdoor	m³/h	570/1680	570/1680	650/1910
		mm	600x740x200	600x740x200	600x740x200
Net Dimension H x W x D	Indoor	kg(lbs)	14(31)	14(31)	14(31)
	Outdoor	mm	540x790x290	540x790x290	578x790x300
		kg(lbs)	36(79)	40(88)	40(88)
Piping Connections (Small / Large)		mm	6.35/9.52	6.35/9.52	6.35/12.7
Drain Hose Diameter (I.D./O.D.)			13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)		m	20(15)	20(15)	20(15)
Max Height Difference			15	15	15
Operation Range	Cooling	°CDB	-10~43	-10~43	-10~43
	Heating	°CDB	-15~24	-15~24	-15~24
Refrigerant (Global Warming Potential)			R410A(1,975)	R410A(1,975)	R410A(1,975)

**Dimensions Models :** AGYG09LVCA / AGYG12LVCA / AGYG14LVCA

(Unit : mm)

